

**MASTERS SERIES®**  
**CROWN & GEYSER**


**BASIC FLOW PATTERN (BFP)**

VERTICAL ONLY



HORSEPOWER	1	2	3 & 3½	5
HT ft UPPER	12 x 2	15 x 2	20 x 2	22 x 2
HT x DIA ft LOWER	5 x 35	6 x 40	6 x 42	7 x 50
ELECTRICAL RATING Ph   VOLTAGE   AMPS	1   120   19	1   208-240   12.6	1 (3½HP)   208-240   15.2	1   208-240   27.1
	3   208-240   9.6	3   208-240   6.3	3 (3HP)   208-240   10.1	3   208-240   18
	3   208-240   5.4	3   440-480   3.1	3 (3HP)   440-480   5.1	3   440-480   9
3   440-480   2.7				
HT m UPPER	3.5 x .6	4.3 x .6	5.2 x .6	6.7 x .6
HT x DIA m LOWER	1.8 x 9.1	1.7 x 10.6	2.1 x 9.7	3.1 x 15.2
ELECTRICAL RATING Ph   VOLTAGE   AMPS	1   220-230   8	1   208-230   10.5	1   220-230   19	1   208-230   24
	3   380-415   2.6	3   380-415   3.7	3   380-415   5	3   380-415   8



**MASTERS SERIES® DESIGN**

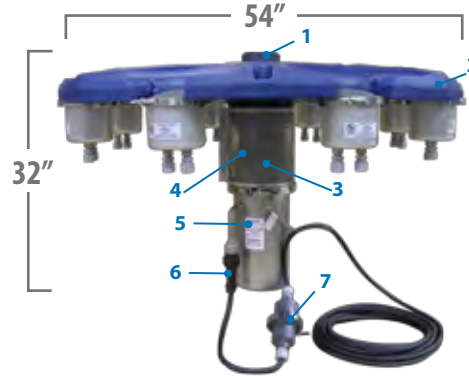

**1 - 5 HP Masters Series  
 Vertical Design**  
 (Min. Operating Depth - 3ft.)

- 1 - Interchangeable nozzles**
- 2 - Low profile float design with recessed pockets for LED & RGBW Lighting**
- 3 - Stainless steel intake screen**
- 4 - Patented, high-efficiency molded composite impeller system**
- 5 - Exclusive custom-designed oil-cooled energy efficient motors with stainless steel motor housing and top plate**
- 6 - AquaLock Connector (ALC) electrical quick disconnect**
- 7 - Exclusive underwater cable disconnect**

## INSTALLATION

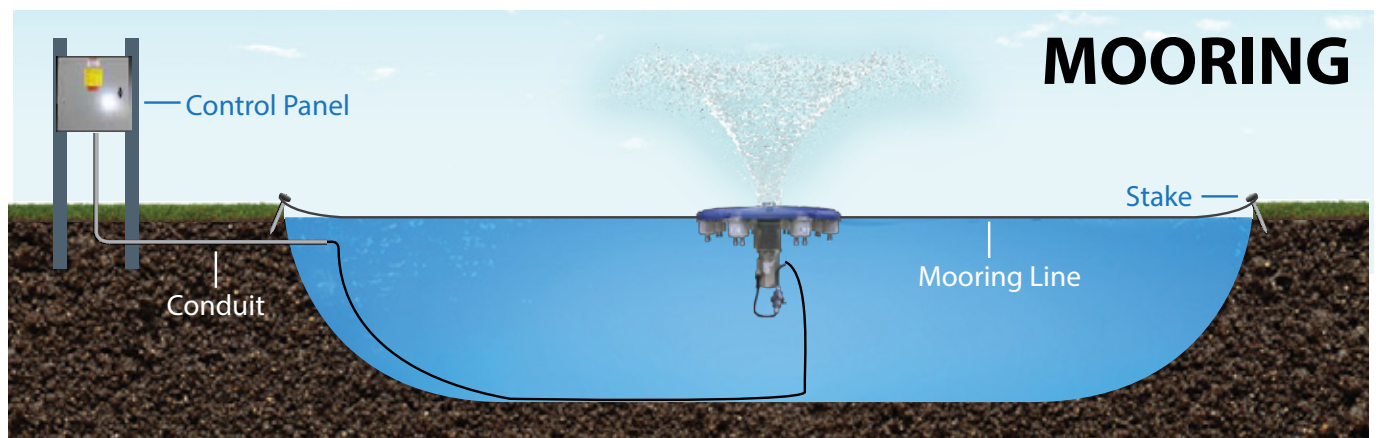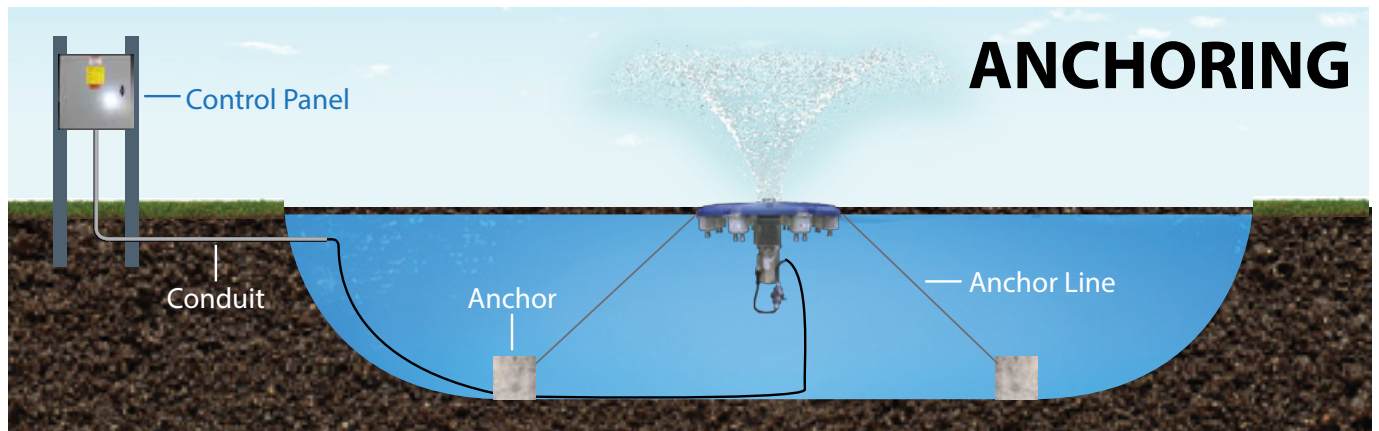

## CONTROL PANEL



### CONTROL PANEL COMPONENTS

- Outdoor rated, lockable enclosure constructed of galvanized steel powder coated gray
- Standard enclosure size 16" x 16" x 6" for 1-5HP
- Overcurrent protection
- Ground fault protection
- Motor contactor and overload
- Capacitors (single phase only)
- Digital timers with battery backup
- LED lighting circuit included in all control panels
- Custom Control Panels for multiple units and options available

